





FLANGES & FLANGED FITTINGS

5kgf/cm² 鋼管差し込み溶接式フランジ B-2221

大きさの呼び10~400

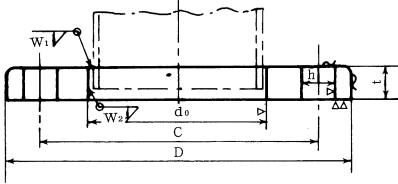

大きさの呼び450~1000

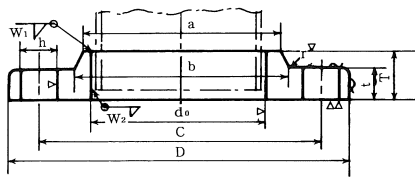

単位 mm

大きさの呼び	適用する鋼管の外径	差し込みの径 d ₀	フランジの外径 D	フランジの各部寸法					ボルト穴			溶接脚長 (参考)		近似計算重量 kg	
				t	T	ハブの径		r	中心円径 C	数	径 h	ボルトのネジの呼び	W ₁		W ₂
						a	b								
10	17.3	17.8	75	9	—	—	—	—	55	4	12	M10	5	2.5	0.27
15	21.7	22.2	80	9	—	—	—	—	60	4	12	M10	5	3	0.3
20	27.2	27.7	85	10	—	—	—	—	65	4	12	M10	5	3	0.37
25	34	34.5	95	10	—	—	—	—	75	4	12	M10	5	3	0.45
32	42.7	43.2	115	12	—	—	—	—	90	4	15	M12	6	3	0.78
40	48.6	49.1	120	12	—	—	—	—	95	4	15	M12	6	3	0.83
50	60.5	61.1	130	14	—	—	—	—	105	4	15	M12	6	3	1.07
65	76.3	77.1	155	14	—	—	—	—	130	4	15	M12	6	4	1.49
80	89.1	90	180	14	—	—	—	—	145	4	19	M16	6	4	1.99
(90)	101.6	102.6	190	14	—	—	—	—	155	4	19	M16	6	4	2.09
100	114.3	115.4	200	16	—	—	—	—	165	8	19	M16	7	4	2.39
125	139.8	141.2	235	16	—	—	—	—	200	8	19	M16	7	4	3.23
150	165.2	166.6	265	18	—	—	—	—	230	8	19	M16	7	5	4.41
(175)	190.7	192.1	300	18	—	—	—	—	260	8	23	M20	7.5	5	5.51
200	216.3	218	320	20	—	—	—	—	280	8	23	M20	8.5	6	6.33
(225)	241.8	243.7	345	20	—	—	—	—	305	12	23	M20	9	6	6.64
250	267.4	269.5	385	22	—	—	—	—	345	12	23	M20	10	6	9.45
300	318.5	321	430	22	—	—	—	—	390	12	23	M20	10	6	10.3
350	355.6	358.1	480	24	—	—	—	—	435	12	25	M22	12	7	14.
400	406.4	409	540	24	—	—	—	—	495	16	25	M22	13	7	16.9
450	457.2	460	605	24	40	495	500	5	555	16	25	M22	12	7	24.8
500	508	511	655	24	40	546	552	5	605	20	25	M22	12	7	26.9
550	558.8	562	720	26	42	597	603	5	665	20	27	M24	12	7	34.1
600	609.6	613	770	26	44	648	654	5	715	20	27	M24	12	7	37.5
650	660.4	664	825	26	48	702	708	5	770	24	27	M24	12	7	42.8
700	711.2	715	875	26	48	751	758	5	820	24	27	M24	12	7	45.4
750	762	766	945	28	52	802	810	5	880	24	33	M30	12	7	57.4
800	812.8	817	995	28	52	854	862	5	930	24	33	M30	13	8	60.8
(850)	863.6	868	1045	28	54	904	912	5	980	24	33	M30	13	8	63.5
900	914.4	919	1095	30	56	956	964	5	1030	24	33	M30	13	8	75.3
1000	1016	1021	1195	32	60	1058	1066	5	1130	28	33	M30	14	9	88.5

あらゆる フランジ
あらゆる 寸法



大幸フランジ